




L00800BX

Boxer 800W

■ SPECIFICATIONS

Identity No.	L00800BX
Capacity	800W
Lamp Bulb Voltage	95V
Par Lens	Ø175mm (6-7/8 in.)
Weight (without barndoor)	2.5 kg
Lamp Type	HMI 800W SE 5600K
Lamp Holder	G22
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 20
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3.5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

■ DIMENSIONS (mm)

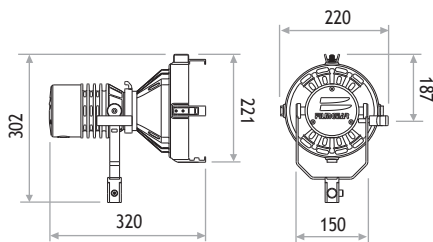

■ PHOTOMETRIC DATA

		Distance	6m	9m	12m
800W Spot (8°)	Lux		58748	26110	14687
	Beam Ø		0.84 m	1.26 m	1.68 m
Medium Flood (10° x 20°)	Lux		8838	3928	2209
	Beam Ø		1.05 x 2.12 m	1.57 x 3.17 m	2.10 x 4.23 m
Wide Flood (20° x 45°)	Lux		5081	2258	1270
	Beam Ø		2.16 x 4.97 m	3.17 x 7.46 m	4.23 x 9.94 m
Super Wide Flood (40°)	Lux		1843	819	461
	Beam Ø		4.37 m	6.55 m	8.74 m
Frosted Super Flood (37°)	Lux		1089	484	272
	Beam Ø		4.02 m	6.02 m	8.03 m

■ PACKAGE CONTENT

Aluminium Lamp Housing with 4-leaf Rotatable Barndoor
Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Frames
Lens Case
G22 Lampholder
Igniter
Cable with Multipin Connector
Stirrup with Ø16mm (5/8 in.) Socket
Glass Becker

■ ACCESSORIES

800W Electronic Ballast
Head to Ballast Cable 7m (23 ft.)
Head to Ballast Cable 15m (49 ft.)
4-leaf Rotatable Barndoor
Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Frames :
Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
Lens Case
Glass Becker
Set of Softbox with T-ring