

Daylight Par Faceted F18k

FACETED



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø645mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F18k


SPECIFICATIONS

| | |
|-------------------------------------|--------------------------|
| Identity No. | L18000FP |
| Capacity | 18,000W |
| Lamp Bulb Voltage | 200V |
| UV Protective Lens | Ø645mm |
| Lamp Type | HMI 18000W/SE |
| Color Temp. | 5600K |
| Lamp Holder | GX51 |
| Stirrup | Ø28mm (1-1/8 in.) Spigot |
| Class / IP Rating | 1 / IP 23 |
| Max. Surface Temp. | 260 °C |
| Max. Ambient Temp. | 45 °C |
| Min. Distance to Illuminated Object | 15 m |
| Min. Distance to Flammable Object | 2 m |
| Operating Range | +45° ~ 0° ~ -45° |
| Weight (Lamphead) | 66.0 kg |
| Weight (with barndoor) | 72.0 kg |

ACCESSORIES

- Electronic Ballast V3 : 18kW/12kW
- Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø737mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

PHOTOMETRIC DATA

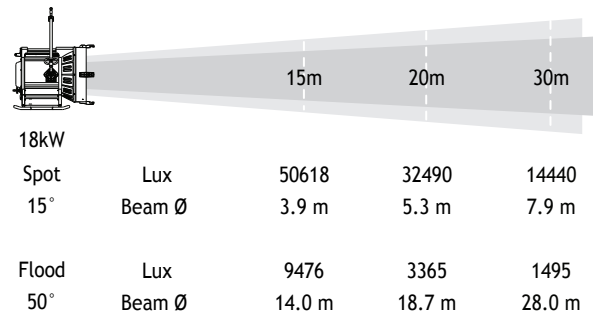

DIMENSIONS (mm)

