




L12000DS

Daylight Fresnel 12000W SE


■ SPECIFICATIONS

Identity No.	L12000DS
Capacity	12,000W
Lamp Bulb Voltage	165V
Fresnel Lens	Ø500mm (19-5/8 in.)
Weight (without barndoor)	51.0 kg
Weight (with barndoor)	55.5 kg
Lamp Type	12000W SE 5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	2 m
Operating Range	38° - 0° - 38°

■ DIMENSIONS (mm)

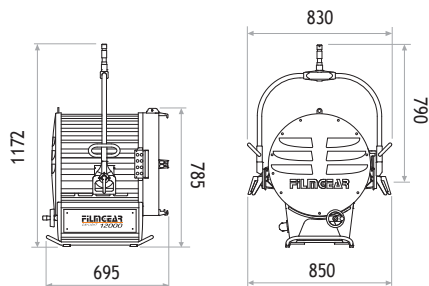

■ PHOTOMETRIC DATA

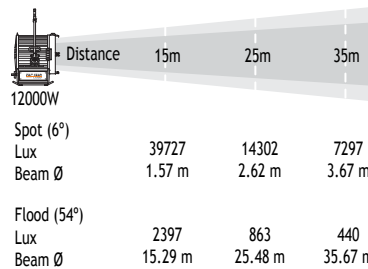

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm (19-5/8 in.) Fresnel Lens
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

■ ACCESSORIES

- 18kW/12kW/6kW Electronic Ballast
- 18kW/12kW Electronic Ballast
- 12kW/6kW Electronic Ballast
- Head to Ballast Cable 15m (49 ft.)
- Head to Ballast Cable 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø622mm (24-1/2 in.) :
 - Full Single Scrim
 - Full Double Scrim
 - Half Single Scrim
 - Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire