




L00575DS

Daylight Fresnel 575W SE

SPECIFICATIONS

Identity No.	L00575DS
Capacity	575W
Lamp Bulb Voltage	95V
Fresnel Lens	Ø130mm (5-1/8 in.)
Weight (without barndoor)	6.4 kg
Weight (with barndoor)	7.0 kg
Lamp Type	575W SE 5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

DIMENSIONS (mm)

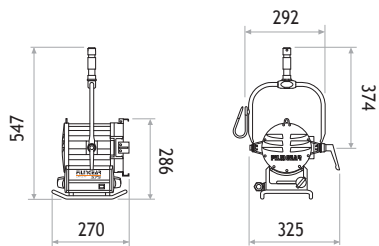

PHOTOMETRIC DATA

Distance	2m	5m	8m
575W Spot (6°)			
Lux	68806	11009	4300
Beam Ø	0.21 m	0.52 m	0.84 m
575W Flood (55°)			
Lux	7020	1123	439
Beam Ø	2.08 m	5.21 m	8.33 m

PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Fresnel Lens
- G22 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

ACCESSORIES

- 1.2kW/575W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrim Ø197mm (7-3/4 in.) :
 - Full Single Scrim
 - Full Double Scrim
 - Half Single Scrim
 - Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire