




L06000DS

## Daylight Fresnel 6000W SE


### ■ SPECIFICATIONS

Identity No.	L06000DS
Capacity	6,000W
Lamp Bulb Voltage	125V
Fresnel Lens	Ø450mm (17-3/4 in.)
Weight (without barndoor)	37.6 kg
Weight (with barndoor)	42.6 kg
Lamp Type	6000W SE 5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	200 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	8 m
Min. Distance to Flammable Object	1.5 m
Operating Range	45° - 0° - 45°

### ■ DIMENSIONS (mm)

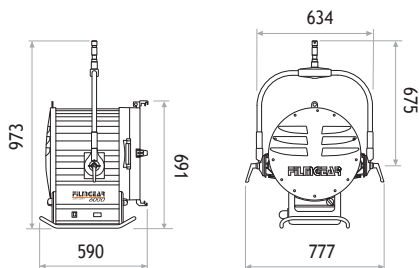

### ■ PHOTOMETRIC DATA

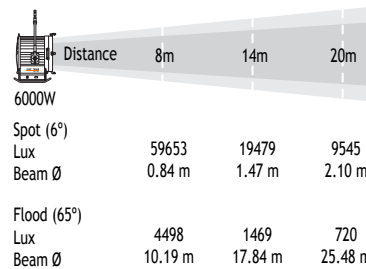

### ■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø450mm (17-3/4 in.) Fresnel Lens
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

### ■ ACCESSORIES

- 18kW/12kW/6kW Electronic Ballast
- 12kW/6kW Electronic Ballast
- 6000W Electronic Ballast
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrim Ø533mm (21 in.) :
  - Full Single Scrim
  - Full Double Scrim
  - Half Single Scrim
  - Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire