




L12000DP

Daylight Par 12000W

SPECIFICATIONS

Identity No.	L12000DP
Capacity	12,000W
Lamp Bulb Voltage	160V
Protective Lens	Ø500mm (19-5/8 in.)
Par Lens	Ø500mm (19-5/8 in.)
Weight (without barndoor)	50.7 kg
Weight (with barndoor)	56.3 kg
Lamp Type	HMI 12000W SE 5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15 m
Min. Distance to Flammable Object	2 m
Operating Range	30° - 0° - 30°

DIMENSIONS (mm)

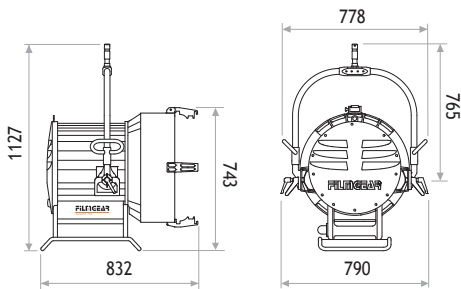

PHOTOMETRIC DATA

		Distance			
		20m	30m	40m	
12000W	Spot (9°)	Lux Beam Ø	41410 3.15 m	18404 4.72 m	10353 6.30 m
	Medium Flood (10° x 20°)	Lux Beam Ø	14266 3.50 x 7.05 m	6341 5.25 x 10.58 m	3567 7.00 x 14.11 m
	Wide Flood (20° x 40°)	Lux Beam Ø	4621 7.05 x 14.46 m	2054 10.58 x 21.84 m	1155 14.11 x 29.12 m
	Super Wide Flood(42°)	Lux Beam Ø	2525 15.35 m	1122 23.03 m	631 30.71 m
	Frosted Super Flood (36°)	Lux Beam Ø	2200 13.00 m	978 19.50 m	550 26.00 m

PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm (19-5/8 in.) Protective Lens
- Set of 5 Par Lenses Ø500mm (19-5/8 in.) with Frames
- Lens Case
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

ACCESSORIES

- 18kW/12kW/6kW Electronic Ballast
- 18kW/12kW Electronic Ballast
- 12kW/6kW Electronic Ballast
- Head to Ballast Cable 15m (49 ft.)
- Head to Ballast Cable 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø500mm (19-5/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø533mm (21 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire