




L00200DP

## Daylight Par 200W

### ■ SPECIFICATIONS

Identity No.	L00200DP
Capacity	200W
Lamp Bulb Voltage	70V
Protective Lens	Ø130mm (5-1/8 in.)
Par Lens	Ø130mm (5-1/8 in.)
Weight (without barndoor)	3.2 kg
Weight (with barndoor)	3.7 kg
Lamp Type	HMI 200W SE 5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

### ■ DIMENSIONS (mm)

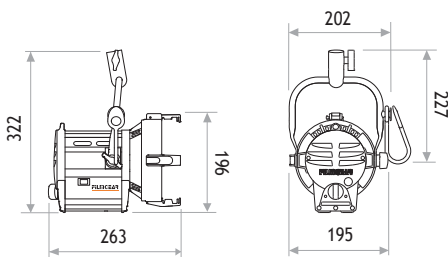

### ■ PHOTOMETRIC DATA

		Distance	2m	4m	6m
200W					
Spot (9°)	Lux		68175	17044	7575
	Beam Ø		0.31 m	0.63 m	0.94 m
Medium Flood (10° x 20°)	Lux		29315	7329	3257
	Beam Ø		0.35 x 0.71 m	0.70 x 1.41 m	1.05 x 2.12 m
Wide Flood (20° x 40°)	Lux		11953	2988	1328
	Beam Ø		0.71 x 1.46 m	1.41 x 2.91 m	2.12 x 4.37 m
Super Wide Flood (40°)	Lux		6363	1591	707
	Beam Ø		1.46 m	2.91 m	4.37 m
Frosted Super Flood (32°)	Lux		5090	1273	566
	Beam Ø		1.15 m	2.29 m	3.44 m

### ■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames
- Lens Case
- GZY9.5 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

### ■ ACCESSORIES

- 400W/200W Electronic Ballast with Multi-Voltage
- 400W/200W Electronic Ballast AC/DC with Multi-Voltage
- 200W Electronic Ballast with Multi-Voltage
- 200W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- DC Cable 1.5m (5 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames :
  - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø168mm (6-5/8 in.) :
  - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire