




L00200DM

Daylight Par 200W Mini

SPECIFICATIONS

Identity No.	L00200DM
Capacity	200W
Lamp Bulb Voltage	70V
Protective Lens	Ø112mm (4-3/8 in.)
Par Lens	Ø112mm (4-3/8 in.)
Weight (without barndoor)	1.4 kg
Weight (with barndoor)	1.7 kg
Lamp Type	HMI 200W SE 5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

DIMENSIONS (mm)

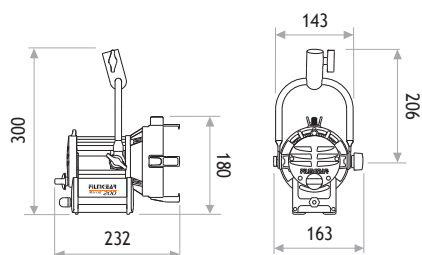

PHOTOMETRIC DATA

		Distance	2m	4m	6m
200W					
Spot (9°)	Lux		41587	10397	4621
	Beam Ø		0.31 m	0.63 m	0.94 m
Medium Flood (10° x 19°)	Lux		17882	4471	1987
	Beam Ø		0.35 x 0.67 m	0.70 x 1.34 m	1.05 x 2.01 m
Wide Flood (20° x 38°)	Lux		7291	1823	810
	Beam Ø		0.71 x 1.38 m	1.41 x 2.75 m	2.12 x 4.13 m
Super Wide Flood (36°)	Lux		3881	970	431
	Beam Ø		1.30 m	2.60 m	3.90 m
Frosted Super Flood (30°)	Lux		3105	776	345
	Beam Ø		1.07 m	2.14 m	3.22 m

PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø112mm (4-3/8 in.) Protective Lens
- Set of 5 Par Lenses Ø112mm (4-3/8 in.) with Frames
- Lens Case
- GZY9.5 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

ACCESSORIES

- 400W/200W Electronic Ballast with Multi-Voltage
- 400W/200W Electronic Ballast AC/DC with Multi-Voltage
- 200W Electronic Ballast with Multi-Voltage
- 200W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- DC Cable 1.5m (5 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø112mm (4-3/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø127mm (5 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire