




L04025DP

Daylight Par 4kW/2.5kW

■ SPECIFICATIONS

Identity No.	L04025DP
Capacity	4,000W / 2,500W
Lamp Bulb Voltage	200V / 115V
Protective Lens	Ø335mm (13-1/8 in.)
Par Lens	Ø300mm (11-3/4 in.)
Weight (without barndoor)	19.6 kg
Weight (with barndoor)	22.1 kg
Lamp Type	HMI 4kW/2.5kW SE 5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	1 m
Operating Range	45° - 0° - 45°

■ DIMENSIONS (mm)

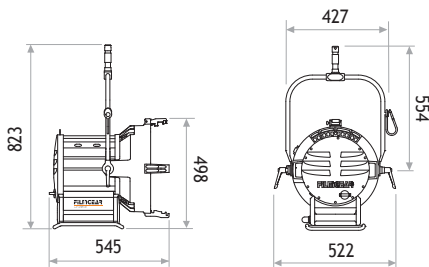

■ PHOTOMETRIC DATA

4000W				2500W					
		Distance 10m	15m	20m		Distance 10m	15m	20m	
Spot (8°)	Lux	57318	25474	14329	Spot (8°)	Lux	54288	24128	13572
	Beam Ø	1.40 m	2.10 m	2.08 m		Beam Ø	1.40 m	2.10 m	2.80 m
Medium Flood (10° x 20°)	Lux	22574	10033	5643	Medium Flood (10° x 20°)	Lux	17827	7923	4457
	Beam Ø	1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m		Beam Ø	1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m
Wide Flood (20° x 45°)	Lux	7838	3479	1957	Wide Flood (20° x 40°)	Lux	3384	1504	846
	Beam Ø	3.53 x 8.28 m	5.29 x 12.43 m	7.05 x 16.56 m		Beam Ø	3.53 x 7.28m	5.29 x 10.92 m	7.05 x 14.46 m
Super Wide Flood (40°)	Lux	4040	1976	1010	Super Wide Flood (30°)	Lux	2677	1190	669
	Beam Ø	7.28 m	10.92 m	14.46 m		Beam Ø	5.36 m	8.04 m	10.72 m
Frosted Super Flood (36°)	Lux	2677	1190	669	Frosted Super Flood (35°)	Lux	1326	589	332
	Beam Ø	6.50 m	9.75 m	13.00 m		Beam Ø	6.31 m	9.46 m	12.61 m

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø335mm (13-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø300mm (11-3/4 in.) with Frames
- Lens Case
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

■ ACCESSORIES

- 4kW/2.5kW Electronic Ballast with Multi-Voltage
- 4kW/2.5kW Electronic Ballast
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø300mm (11-3/4 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø394mm (15-1/2 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire