




L00400DM

Daylight Par 400W Mini


■ SPECIFICATIONS

Identity No.	L00400DM
Capacity	400W
Lamp Bulb Voltage	70V
Protective Lens	Ø130mm (5-1/8 in.)
Par Lens	Ø130mm (5-1/8 in.)
Weight (without barndoor)	3.0 kg
Weight (with barndoor)	3.3 kg
Lamp Type	HMI 400W SE 5600K
Lamp Holder	GZZ9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

■ DIMENSIONS (mm)

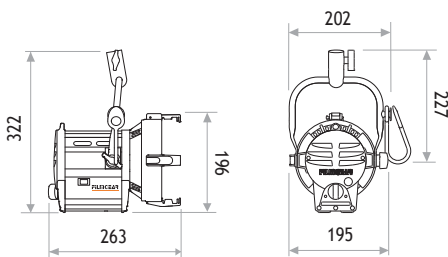

■ PHOTOMETRIC DATA

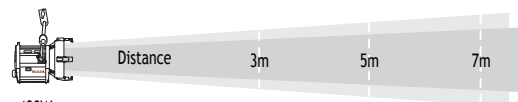

400W		Distance	3m	5m	7m
Spot (9°)	Lux		50182	18059	9214
	Beam Ø		0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux		20368	7333	3741
	Beam Ø		0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 42°)	Lux		5710	2056	1049
	Beam Ø		1.06 x 2.30 m	1.76 x 3.84 m	2.47 x 5.37 m
Super Wide Flood (40°)	Lux		4363	1571	802
	Beam Ø		2.18 m	3.64 m	5.10 m
rosted Super Flood (34°)	Lux		3199	1151	587
	Beam Ø		1.83 m	3.06 m	4.28 m

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames
- Lens Case
- GZZ9.5 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

■ ACCESSORIES

- 400W/200W Electronic Ballast with Multi-Voltage
- 400W/200W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- DC Cable 1.5m (5 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø168mm (6-5/8 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire