




L00575DP

Daylight Par 575W

■ SPECIFICATIONS

Identity No.	L00575DP
Capacity	575W
Lamp Bulb Voltage	95V
Protective Lens	Ø175mm (6-7/8 in.)
Par Lens	Ø175mm (6-7/8 in.)
Weight (without barndoor)	5.2 kg
Weight (with barndoor)	5.8 kg
Lamp Type	HMI 575W SE 5600K
Lamp Holder	G22
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

■ DIMENSIONS (mm)

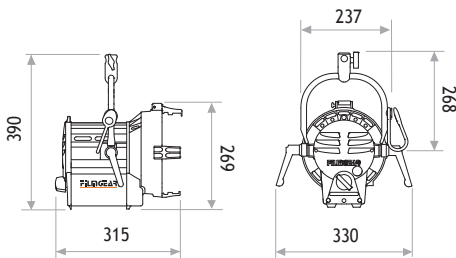

■ PHOTOMETRIC DATA

		Distance	3m	5m	7m
575W					
Spot (9°)	Lux		83636	30098	15356
	Beam Ø		0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux		33947	12221	6235
	Beam Ø		0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 45°)	Lux		9516	3426	1748
	Beam Ø		1.06 x 2.49 m	1.76 x 4.14 m	2.47 x 5.80 m
Super Wide Flood (40°)	Lux		7272	2618	1336
	Beam Ø		2.18 m	3.64 m	5.10 m
Frosted Super Flood (35°)	Lux		5331	1919	979
	Beam Ø		1.89 m	3.15 m	4.41 m

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø175 mm (6-7/8 in.) Protective Lens
- Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Frames
- Lens Case
- G22 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø16mm (5/8 in.) Socket

■ ACCESSORIES

- 1.2kW/575W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø197mm (7-3/4 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire