




L00575BP

## Daylight Par 575W BIB

### ■ SPECIFICATIONS

Identity No.	L00575BP
Capacity	575W
Lamp Bulb Voltage	95V
Protective Lens	Ø208mm (8-1/8 in.)
Par Lens	Ø250mm (9-7/8 in.)
Weight (without barndoor)	9.1 kg
Weight (with barndoor)	10.0 kg
Lamp Type	HMI 575W SE 5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 20
Max. Surface Temp.	180 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

### ■ DIMENSIONS (mm)

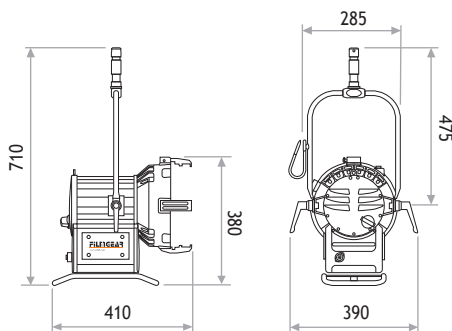

### ■ PHOTOMETRIC DATA

	Distance	3m	5m	7m
575W BIB				
Spot (9°)	Lux	83636	30098	15356
	Beam Ø	0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux	33947	12221	6235
	Beam Ø	0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 45°)	Lux	9516	3426	1748
	Beam Ø	1.06 x 2.49 m	1.76 x 4.14 m	2.47 x 5.80 m
Super Wide Flood (40°)	Lux	7272	2618	1336
	Beam Ø	2.18 m	3.64 m	5.10 m
Frosted Super Flood (35°)	Lux	5331	1919	979
	Beam Ø	1.89 m	3.15 m	4.41 m

### ■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø208mm (8-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø250mm (9-7/8 in.) with Frames
- Lens Case
- G22 Lampholder
- Igniter
- Built-in 575W Electronic Ballast 220V
- Power Cable with In-line Switch
- Stirrup with Ø28mm (1-1/8 in.) Spigot

### ■ ACCESSORIES

- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø250mm (9-7/8 in.) with Frames :
  - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø254mm (10 in.) :
  - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire
- Transport Case