




L06000DP

Daylight Par 6000W

■ SPECIFICATIONS

Identity No.	L06000DP
Capacity	6,000W
Lamp Bulb Voltage	125V
Protective Lens	Ø420mm (16-1/2 in.)
Par Lens	Ø420mm (16-1/2 in.)
Weight (without barndoor)	30.3 kg
Weight (with barndoor)	35.3 kg
Lamp Type	HMI 6000W SE 5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	12 m
Min. Distance to Flammable Object	1.5 m
Operating Range	38° - 0° - 38°

■ DIMENSIONS (mm)

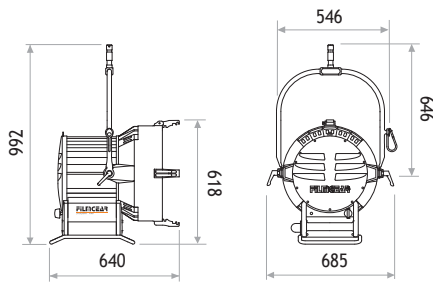

■ PHOTOMETRIC DATA

		Distance		
		15m	20m	25m
6000W				
Spot (8°)	Lux Beam Ø	49491 2.10 m	27839 2.80 m	17817 3.50 m
Medium Flood (10° x 20°)	Lux Beam Ø	18966 2.62 x 5.29 m	10669 3.50 x 7.05 m	6828 4.37 x 8.82 m
Wide Flood (20° x 40°)	Lux Beam Ø	7238 5.29 x 10.92 m	4071 7.05 x 14.46 m	2606 8.82 x 18.20 m
Super Wide Flood (42°)	Lux Beam Ø	3860 11.52 m	2172 15.35 m	1390 19.19 m
Frosted Super Flood (36°)	Lux Beam Ø	2313 9.75 m	1301 13.00 m	833 16.25 m

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø420mm (16-1/2 in.) Protective Lens
- Set of 5 Par Lenses Ø420mm (16-1/2 in.) with Frames
- Lens Case
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

■ ACCESSORIES

- 18kW/12kW/6kW Electronic Ballast
- 12kW/6kW Electronic Ballast
- 6000W Electronic Ballast
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø420mm (16-1/2 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø495mm (19-1/2 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire