




L00800DP

Daylight Par 800W


■ SPECIFICATIONS

Identity No.	L00800DP
Capacity	800W
Lamp Bulb Voltage	95V
Protective Lens	Ø208mm (8-1/8 in.)
Par Lens	Ø250mm (9-7/8 in.)
Weight (without barndoor)	6.9 kg
Weight (with barndoor)	7.8 kg
Lamp Type	CSR 800W SE/HR 5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	3.5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	45° - 0° - 45°

■ DIMENSIONS (mm)

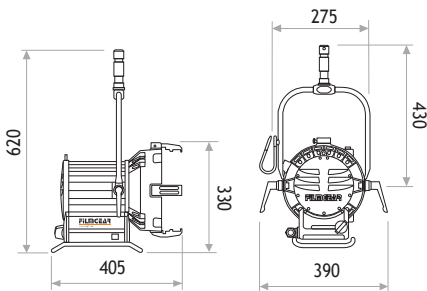

■ PHOTOMETRIC DATA

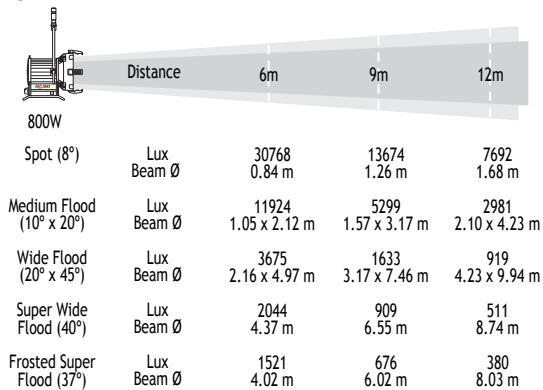

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø208mm (8-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø250mm (9-7/8 in.) with Frames
- Lens Case
- G22 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

■ ACCESSORIES

- 1.8kW/1.2kW/800W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast with Multi-Voltage
- 800W/575W Electronic Ballast AC/DC with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø250mm (9-7/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrims Ø246mm (9-5/8 in.) :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire