


LED Profile 250W 25°-50°




SPECIFICATIONS

Identity No.	L2512550LP (Daylight) L2502550LP (Tungsten)
Capacity	250W
Voltage	100-250V AC
Frequency	50Hz / 60Hz
Current	1.1A@ 220V
Color Temp.	5600K / 3200K
CRI	>90
Beam Angle	25° -50°
Dimming	0-100%
DMX Channel	1
Control Signal	DMX 512
Working Noise	< 25dB
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	70°C
Max. Ambient Temp.	35°C
Operation Range	+90° - 0° - -90°
Weight (Lamphead)	15.0 kg

DIMENSIONS (mm)

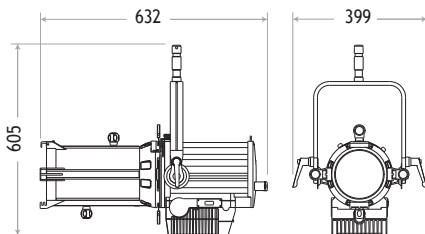

PHOTOMETRIC DATA

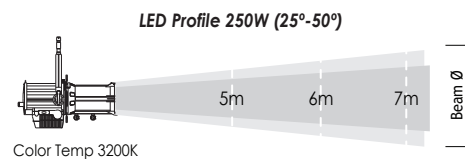

	5m	6m	7m
25° Lux	2000	1400	970
25° Beam Ø (m)	2.22	2.66	3.10
50° Lux	600	420	300
50° Beam Ø (m)	4.66	5.60	6.53

LAMPHEAD CONTENTS

- Lamp Housing (black color)
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Filter Frame
- Set of 4 Cutters
- Power Cable
- DMX

ACCESSORIES

- Filter Frame
- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)