



U-Flo 2+2

SPECIFICATIONS


Identity No.	L02200UF (M.O.) L022D0UF (M.O. / DMX) L0220PUF (P.O.) L022DPUF (P.O. / DMX)
Capacity	220W (55W x 4)
Voltage	190V - 250V
Frequency	50Hz - 60Hz
Input Current	1.0A @220V
Power Factor	0.99
Efficiency	92%
Dimming Control by DMX	1% - 100%
Fusing	5A
Tube Type	55W 21" CFL
Color Temp.	5600K / 3200K
Lamp Holder	2G11
Stirrup with M.O. / P.O.	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 21
Max. Ambient Temp.	50°C (122°F)
Operation Range	+45° - 0° - -45°
Weight (Lamphead with Tubes)	9.3 kg (M.O.) 11.2 kg (P.O.)

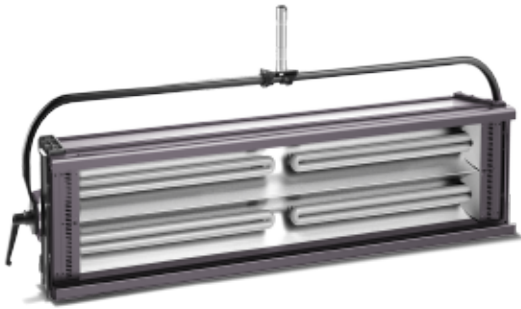

DIMENSIONS (mm)

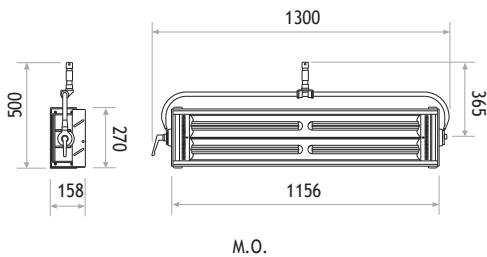

M.O.

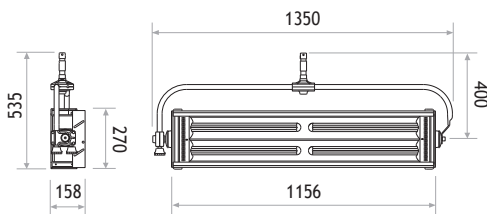

P.O.

* (M.O.) = Manual Operated
(P.O.) = Pole Operated

PHOTOMETRIC DATA

2+2 Bank	Distance	1.5m	2.0m	3.0m
Beam Angle (65° x 46°)	Lux	1490	840	370
	Beam	1.91 x 1.27 m	2.55 x 1.70 m	3.82 x 2.55 m
With Intensifier - Gloss Beam Angle (54° x 35°)	Lux	2710	1530	680
	Beam	1.53 x 0.95 m	2.04 x 1.26 m	3.06 x 1.89 m
With Reflective Barndoor - Embossed Beam Angle (62° x 39°)	Lux	1730	980	430
	Beam	1.80 x 1.06 m	2.40 x 1.42 m	3.61 x 2.12 m
With Honey Comb Beam Angle (48° x 37°)	Lux	1240	700	310
	Beam	1.27 x 1.00 m	1.78 x 1.34 m	2.67 x 2.01 m

LAMPHEAD CONTENTS

Lamp Housing without Tubes
Built-in Electronic Ballast
Power Cable with Connector
Stirrup with Ø28mm (1-1/8 in.) Spigot
Pole Operated Stirrup (for P.O.)

ACCESSORIES

Reflective Barndoor
Intensifier
Honeycomb
Eggcrate
Filter Frame
Safety Cable (for lamphead)