


U-Flo 2

SPECIFICATIONS




Identity No.	L02000UF (M.O.) L020D0UF (M.O. / DMX) L0200PUF (P.O.) L020DPUF (P.O. / DMX)
Capacity	110W (55W x 2)
Voltage	190V - 250V
Frequency	50Hz - 60Hz
Input Current	0.5A @220V
Power Factor	0.99
Efficiency	92%
Dimming Control by DMX	1% - 100%
Fusing	3A
Tube Type	55W 21" CFL
Color Temp.	5600K / 3200K
Lamp Holder	2G11
Stirrup with M.O. / P.O.	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 21
Max. Ambient Temp.	50°C (122°F)
Operation Range	+45° - 0° - -45°
Weight (Lamphead with Tubes)	5.5 kg (M.O.) 7.2 kg (P.O.)

DIMENSIONS (mm)

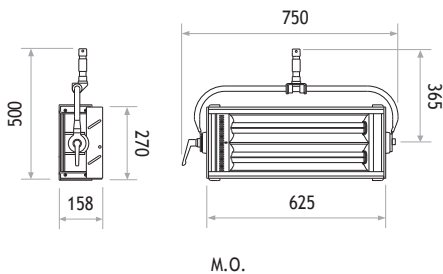

M.O.

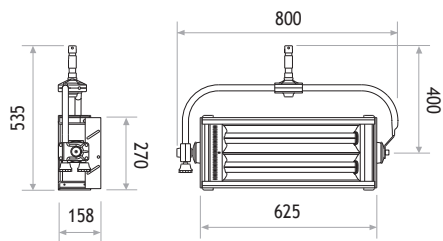

P.O.

PHOTOMETRIC DATA

2 Bank		1.5m	2.0m	3.0m
Beam Angle (60° x 45°)	Lux	680	385	170
	Beam	1.73 x 1.24 m	2.32 x 1.66 m	3.46 x 2.49 m
With Intensifier - Gloss	Lux	1600	900	400
Beam Angle (50° x 34°)	Beam	1.40 x 0.92 m	1.87 x 1.22 m	2.80 x 1.83 m
With Reflective Barndoor - Embossed	Lux	890	500	220
Beam Angle (53° x 37°)	Beam	1.50 x 1.00 m	1.99 x 1.34 m	2.99 x 2.01 m
With Honey Comb	Lux	580	325	145
Beam Angle (45° x 37°)	Beam	1.24 x 1.00 m	1.66 x 1.34 m	2.49 x 2.01 m

LAMPHEAD CONTENTS

- Lamp Housing without Tubes
- Bulti-in Electronic Ballast
- Power Cable with Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Pole Operated Stirrup (for P.O.)

ACCESSORIES

- Reflective Barndoor
- Intensifier
- Honeycomb
- Eggcrate
- Filter Frame
- Safety Cable (for lamphead)

* (M.O.) = Manual Operated
(P.O.) = Pole Operated