



U-Flo 3+3

SPECIFICATIONS


Identity No.	L03300UF (M.O.) L033D0UF (M.O. / DMX) L0330PUF (P.O.) L033DPUF (P.O. / DMX)
Capacity	330W (55W x 6)
Voltage	190V - 250V
Frequency	50Hz - 60Hz
Input Current	1.5A @220V
Power Factor	0.99
Efficiency	92%
Dimming Control by DMX	1% - 100%
Fusing	5A
Tube Type	55W 21" CFL
Color Temp.	5600K / 3200K
Lamp Holder	2G11
Stirrup with M.O. / P.O.	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 21
Max. Ambient Temp.	50°C (122°F)
Operation Range	+45° - 0° - -45°
Weight (Lamphead with Tubes)	11.8 kg (M.O.) 14.0 kg (P.O.)

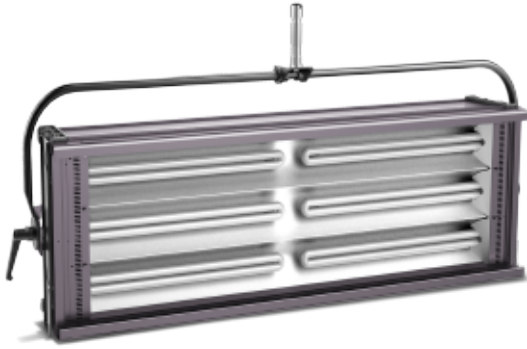

DIMENSIONS (mm)

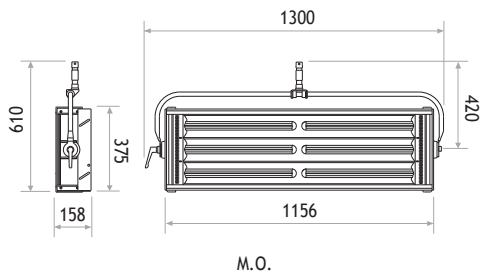

M.O.

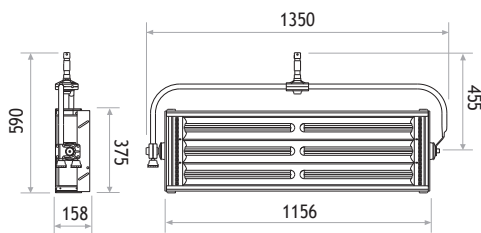

P.O.

* (M.O.) = Manual Operated
(P.O.) = Pole Operated

PHOTOMETRIC DATA

3+3 Bank	Distance	1.5m	2.0m	3.0m
Beam Angle (67° x 48°)	Lux	2310	1300	580
	Beam	1.99 x 1.34 m	2.65 x 1.78 m	3.97 x 2.67 m
With Intensifier - Gloss	Lux	3600	2030	900
Beam Angle (60° x 40°)	Beam	1.73 x 1.09 m	2.31 x 1.46 m	3.46 x 2.18 m
With Reflective Barndoor - Embossed	Lux	2800	1580	700
Beam Angle (63° x 41°)	Beam	1.84 x 1.12 m	2.45 x 1.50 m	3.68 x 2.24 m
With Honey Comb	Lux	1800	1010	450
Beam Angle (50° x 38°)	Beam	1.40 x 1.03 m	1.86 x 1.38 m	2.80 x 2.07 m

LAMPHEAD CONTENTS

Lamp Housing without Tubes
Built-in Electronic Ballast
Power Cable with Connector
Stirrup with Ø28mm (1-1/8 in.) Spigot
Pole Operated Stirrup (for P.O.)

ACCESSORIES

Reflective Barndoor
Intensifier
Honeycomb
Eggcrate
Filter Frame
Safety Cable (for lamphead)