


U-Flo 4+4

SPECIFICATIONS




Identity No.	L04400UF (M.O.) L044D0UF (M.O. / DMX) L0440PUF (P.O.) L044DPUF (P.O. / DMX)
Capacity	440W (55W x 8)
Voltage	190V - 250V
Frequency	50Hz - 60Hz
Input Current	2.2A @220V
Power Factor	0.99
Efficiency	92%
Dimming Control by DMX	1% - 100%
Fusing	8A
Tube Type	55W 21" CFL
Color Temp.	5600K / 3200K
Lamp Holder	2G11
Stirrup with M.O. / P.O.	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 21
Max. Ambient Temp.	50°C (122°F)
Operation Range	+45° - 0° - -45°
Weight (Lamphead with Tubes)	14.8 kg (M.O.) 16.7 kg (P.O.)

DIMENSIONS (mm)

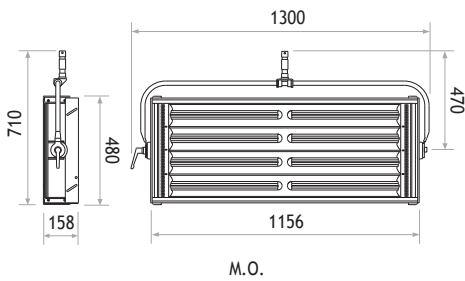

M.O.

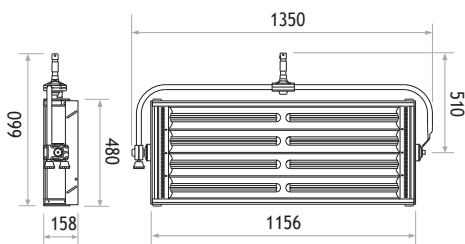

P.O.

* (M.O.) = Manual Operated
(P.O.) = Pole Operated

PHOTOMETRIC DATA

4+4 Bank		1.5m	2.0m	3.0m
Beam Angle (68° x 49°)	Lux Beam	3480 2.02 x 1.37 m	1960 2.70 x 1.82 m	870 4.05 x 2.73 m
With Intensifier - Gloss Beam Angle (62° x 41°)	Lux Beam	5780 1.80 x 1.12 m	3250 2.40 x 1.50 m	1440 3.61 x 2.24 m
With Reflective Barndoor - Embossed Beam Angle (64° x 42°)	Lux Beam	4390 1.87 x 1.15 m	2470 2.50 x 1.53 m	1100 3.75 x 2.30 m
With Honey Comb Beam Angle (50° x 38°)	Lux Beam	2930 1.40 x 1.03 m	1650 1.87 x 1.38 m	730 2.80 x 2.07 m

LAMPHEAD CONTENTS

Lamp Housing without Tubes
Bulti-in Electronic Ballast
Power Cable with Connector
Stirrup with Ø28mm (1-1/8 in.) Spigot
Pole Operated Stirrup (for P.O.)

ACCESSORIES

Reflective Barndoor
Intensifier
Honeycomb
Eggcrate
Filter Frame
Safety Cable (for lamphead)