

LFB 300




LED SPOT 300 (Bi-Color 2700K-6000K)


LAMPHEAD CONTENTS

- Lamp Housing (black color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable

DIMENSIONS (mm)

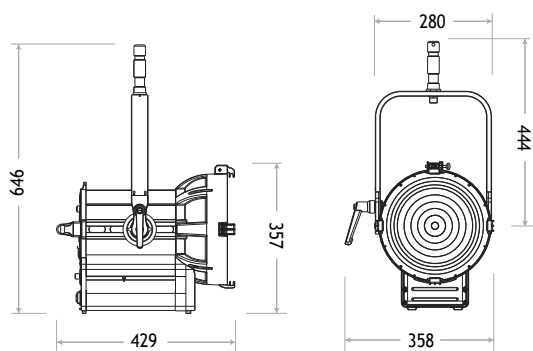

SPECTRUM

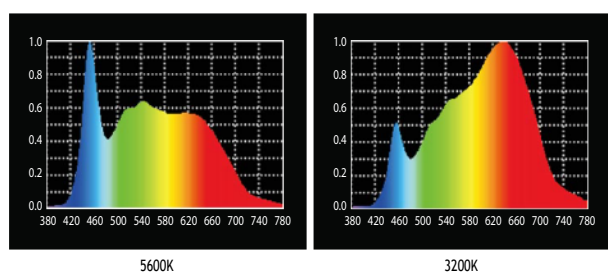

LED Spot 300 (Bi-Color)

SPECIFICATIONS

Identity No.	L0030LFB
Max. Capacity	300W
Voltage	95 - 260V AC, 22-36V DC
Frequency	50Hz / 60Hz
Current	1.4A @220V AC 12.5A @24V DC
Fresnel Lens	Ø250mm
Color Temp.	Adjustable 2700K - 6000K
CRI	>95
TLCI	>95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	35 °C
Operating Range	+45° - 0° - -45°
Weight (Lamphead)	12.0 kg

ACCESSORIES

- Filter Frame
- Safety Cable (for lamphead)

PHOTOMETRIC DATA

		LED Spot 300			
		3m	5m	7m	9m
5600K					
Spot	Lux	25319	9115	4651	2813
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	4864	1751	893	540
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m
3200K					
Spot	Lux	19172	6902	3521	2130
15°	Beam Ø	0.79m	1.32m	1.84m	2.37m
Flood	Lux	3581	1289	658	398
55°	Beam Ø	3.12m	5.21m	7.29m	9.37m

HISTOGRAM

