




L04000DS

## Daylight Fresnel 4000W SE


### ■ SPECIFICATIONS

Identity No.	L04000DS
Capacity	4,000W
Lamp Bulb Voltage	200V
Fresnel Lens	Ø300mm (11-3/4 in.)
Weight (without barndoor)	21.8 kg
Weight (with barndoor)	24.3 kg
Lamp Type	4000W SE 5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	5 m
Min. Distance to Flammable Object	1.2 m
Operating Range	45° - 0° - 45°

### ■ DIMENSIONS (mm)

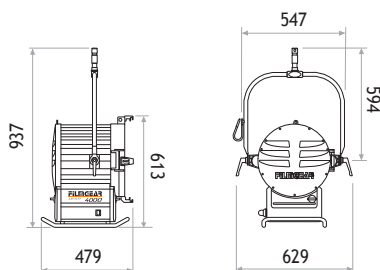

### ■ PHOTOMETRIC DATA

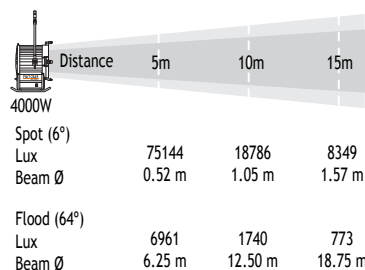

### ■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- G38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

### ■ ACCESSORIES

- 4kW/2.5kW Electronic Ballast with Multi-Voltage
- 4kW/2.5kW Electronic Ballast
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrim Ø394mm (15-1/2 in.) :
  - Full Single Scrim
  - Full Double Scrim
  - Half Single Scrim
  - Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire