


## LED Profile 250W 16°-28°




### SPECIFICATIONS

Identity No.	L2511628LP (Daylight) L2501628LP (Tungsten)
Capacity	250W
Voltage	100-250V AC
Frequency	50Hz / 60Hz
Current	1.1A@ 220V
Color Temp.	5600K / 3200K
CRI	>90
Beam Angle	16° -28°
Dimming	0-100%
DMX Channel	1
Control Signal	DMX 512
Working Noise	< 25dB
LED Life	Approx. 30,000 Hrs
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	70°C
Max. Ambient Temp.	35°C
Operation Range	+90° - 0° - -90°
Weight (Lamphead)	16.0 kg

### DIMENSIONS (mm)

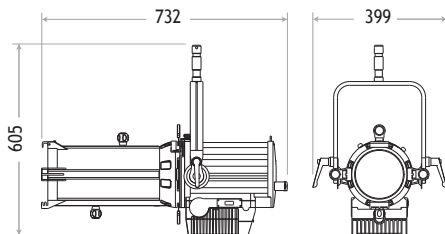

### PHOTOMETRIC DATA

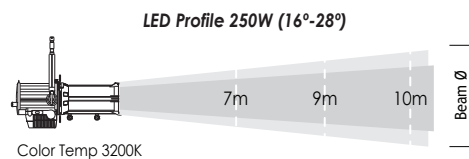

	7m	9m	10m
15.4° Lux	1440	865	697
Beam Ø (m)	1.89	2.43	2.70
27.8° Lux	830	510	410
Beam Ø (m)	3.46	4.45	4.95

### LAMPHEAD CONTENTS

- Lamp Housing (black color)
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Filter Frame
- Set of 4 Cutters
- Power Cable
- DMX

### ACCESSORIES

- Filter Frame
- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)